
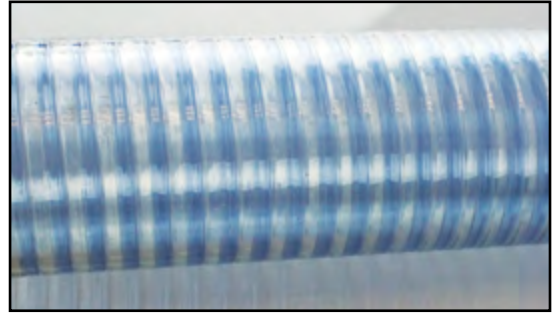


3010

HD PVC FDA USDA 3-A LIQUID FOOD SUCTION HOSE

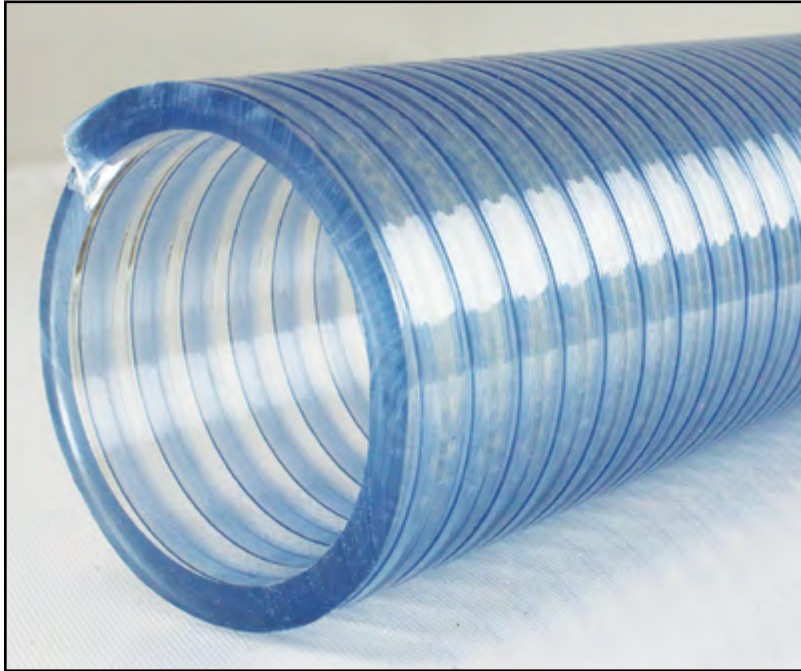

CONSTRUCTION: PVC tube with a sturdy clockwise PVC helix.

TEMPERATURE: -5°F (-23°C) to +140°F (+60°C)

APPLICATION: Transfer of food grade liquids, such as juices, wine, beer and potable water and dairy products.

FEATURES:

- Meets FDA requirements
- Approved by USDA for use in meat and poultry plants
- Meets 3-A sanitary standards, which includes processing dairy products
- Clear visual flow
- Vacuum up to 29" of Hg

SAFETY FACTOR: 3:1

Part Number	I.D.		O.D.		Reinf.	Max. W.P. @ 68° F		Vacuum @ 68° F	Weight		Minimum Bend Radius		Std. Length. (ft.)
	inch	mm	inch	mm		PSI	BAR		lb./ft.	KG/m	inch	mm	
3010-0100-100	1	25.40	1.24	31.50	PVC Helix	71	4.90	29.9	0.26	0.39	3.00	76.20	100
3010-0125-100	1-1/4	31.75	1.54	39.12	PVC Helix	64	4.41	29.9	0.34	0.51	4.00	101.60	100
3010-0150-100	1-1/2	38.10	1.82	46.23	PVC Helix	57	3.93	29.9	0.44	0.65	6.00	152.40	100
3010-0200-100	2	50.80	2.39	60.71	PVC Helix	57	3.93	29.9	0.74	1.10	8.00	203.20	100
3010-0250-100	2-1/2	63.50	2.93	74.42	PVC Helix	57	3.93	29.9	1.01	1.50	10.00	254.00	100
3010-0300-100	3	76.20	3.43	87.12	PVC Helix	57	3.93	29.9	1.21	1.80	12.00	304.80	100
3010-0400-100	4	101.60	4.53	115.06	PVC Helix	43	2.97	29.9	2.02	3.01	15.00	381.00	100

Working pressure (W.P.) is temperature dependent. See the General Information section Table II - Pressure Re-Rating for increased Temperatures (Page 10) for more information.

All sizes may not be stocked in all locations. Check with customer service for availability.
We disclaim any liability for use of our products in applications other than which they are designed.

WARNING: This product can expose you to chemicals including DINP, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information visit www.P65WARNINGS.ca.gov