
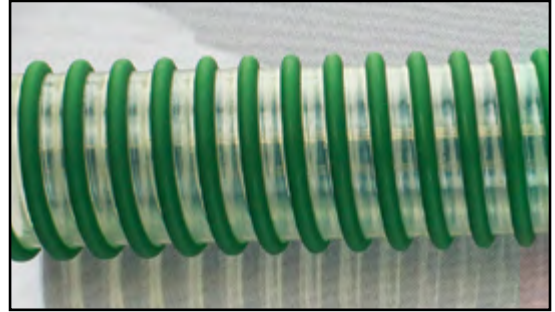


MATERIAL HANDLING HOSE

3021

POLYURETHANE MATERIAL HANDLING AND DUCT HOSE

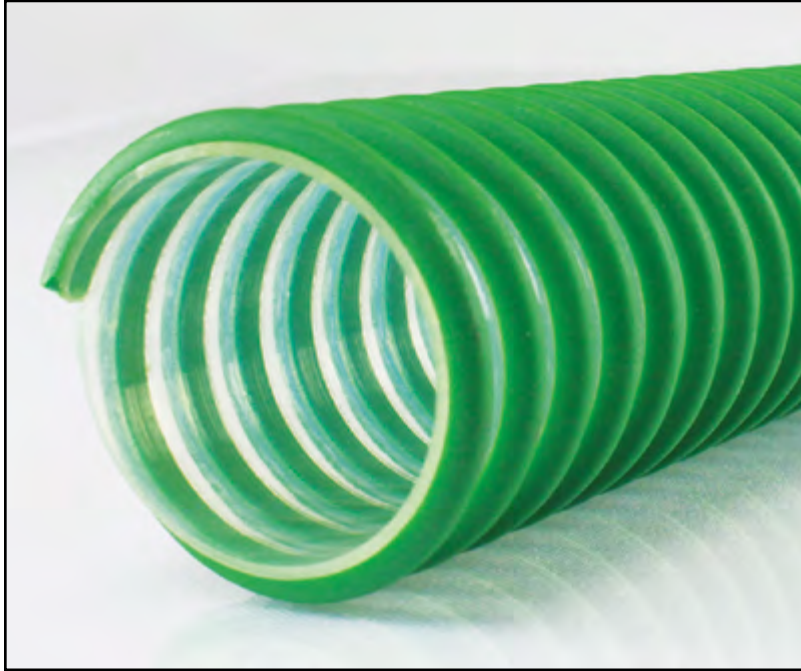

CONSTRUCTION: Polyurethane abrasion resistant tube with sturdy clockwise PVC helix.

TEMPERATURE: -40°F (-40°C) to +140°F (+60°C)

APPLICATION: Insulation blowing, fume removal, ducting, ventilation and dust collection.

FEATURES:

- Abrasion resistant PU
- Clear visual flow
- -40°F cold weather resistance
- Sub-zero flexibility
- Easy to drag with "Go-Glide" external clockwise PVC helix

SAFETY FACTOR: 3:1

Part Number	I.D.		O.D.		Reinf.	Max. W.P. @ 68° F		Vacuum @ 68° F	Weight		Minimum Bend Radius		Std. Length. (ft.)
	inch	mm	inch	mm		PSI	BAR		lb./ft.	KG/m	inch	mm	
3021-0150-100	1-1/2	38.10	1.82	46.23	PVC Helix	20	1.38	15.0	0.23	0.34	0.70	17.80	100
3021-0200-100	2	50.80	2.40	60.96	PVC Helix	15	1.03	12.0	0.32	0.48	1.37	34.80	100
3021-0250-100	2-1/2	63.50	2.90	73.66	PVC Helix	10	0.69	10.0	0.39	0.58	1.37	34.80	100
3021-0300-100	3	76.20	3.43	87.12	PVC Helix	10	0.69	10.0	0.55	0.82	2.25	57.20	100
3021-0400-100	4	101.60	4.48	113.79	PVC Helix	8	0.55	8.0	0.77	1.15	3.00	76.20	100

Working pressure (W.P.) is temperature dependent. See the General Information section Table II - Pressure Re-Rating for increased Temperatures (Page 10) for more information.

All sizes may not be stocked in all locations. Check with customer service for availability.
 We disclaim any liability for use of our products in applications other than which they are designed.

WARNING: This product can expose you to chemicals including DINP, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information visit www.P65WARNINGS.ca.gov