
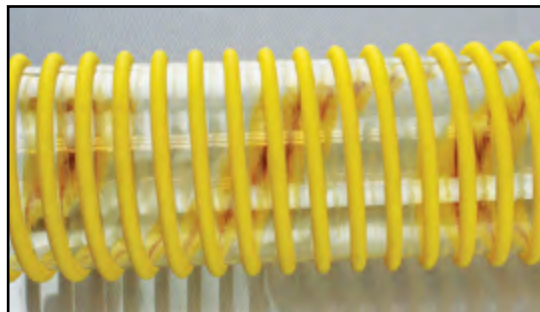


PETROLEUM HOSE

3050

POLYURETHANE GASOLINE AND ALTERNATIVE FUEL VAPOR RECOVERY HOSE - SΩ

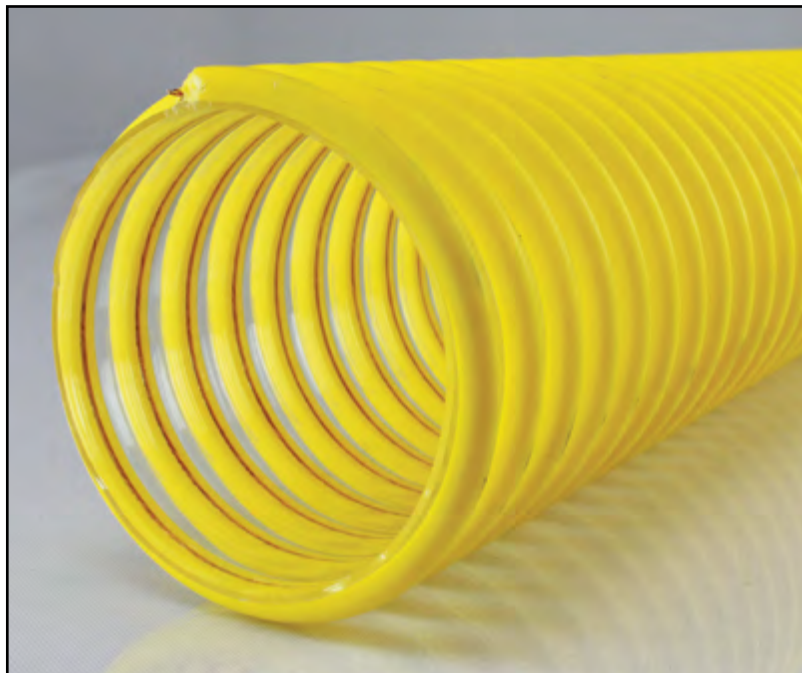

CONSTRUCTION: Polyurethane tube with a sturdy clockwise PVC helix with SΩ ground wire embedded into the hose wall.

TEMPERATURE: -40°F (-40°C) to +140°F (+60°C)

APPLICATION: Used to remove vapors from gasoline and alternative fuels to recovery system in tank truck operations.

SAFETY FACTOR: 3:1

FEATURES:

- Clear visual flow
- -40°F cold weather resistance
- Sub-zero flexibility
- Easy to drag with "Go-Glide" external clockwise PVC helix
- Safety Ohm (SΩ) ground wire embedded into the hose wall to help prevent the build-up of static electricity. SΩ wire must be secured to ground to dissipate static electricity.

Part Number	I.D.		O.D.		Reinf.	Max W.P. @ 68°F		Vacuum @ 68°F	Weight		Minimum Bend Radius		Std. Length (ft.)
	in.	mm	in.	mm		PSI	BAR		lb./ft.	KG/m	in.	mm	
3050-0200-100	2	50.80	2.45	62.23	PVC Helix	10	0.69	15.0	0.50	0.74	3.00	76.20	100
3050-0300-100	3	76.20	3.54	89.92	PVC Helix	8	0.55	15.0	0.79	1.18	4.00	101.60	100
3050-0400-100	4	101.60	4.57	116.08	PVC Helix	7	0.48	12.0	1.11	1.65	5.00	127.00	100

Working pressure (W.P.) is temperature dependent. See the General Information section Table II - Pressure Re-Rating for increased Temperatures (Page 10) for more information.

Note: Use JASON YELLOW banding sleeves only when securing coupling for 2", 3" and 4" ID's.

SΩ = Safety Ohm

All sizes may not be stocked in all locations. Check with customer service for availability.

We disclaim any liability for use of our products in applications other than which they are designed.

WARNING: This product can expose you to chemicals including DINP, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information visit www.P65WARNINGS.ca.gov