


MATERIAL HANDLING HOSE



4310

GUNITE HOSE

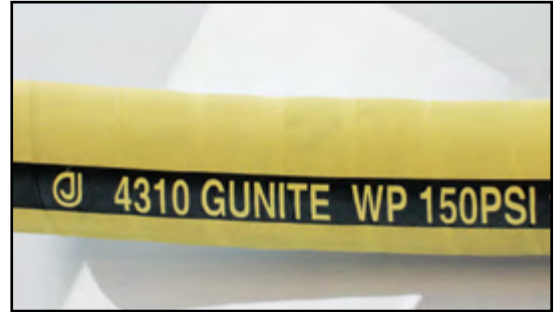

CONSTRUCTION: Tube is 1/4" thick, pure gum rubber, tan color. Cover is EPDM, pin-pricked and tan in color. Reinforcement is a two-ply synthetic fabric with a static wire.

TEMPERATURE: -40°F (-40°C) to +185°F (+85°C)

BRANDING: Jason logo 4310 GUNITE 150 PSI 10.35 BAR.

APPLICATION: For conveyance of sand and cement to the mixing gun.

FEATURES:

- 1/4" gum tube has superior abrasion resistance
- Weather and abrasion resistant cover
- Cover compound is non-marking, allows for work around buildings and pool tiles

SAFETY FACTOR: 3:1

Part Number	I.D.		O.D.		Reinf. Plies	Max W.P. @ 68°F		Vacuum @ 68°F	Weight		Minimum Bend Radius		Std. Length (ft.)
	in.	mm	in.	mm		PSI	BAR		lb./ft.	KG/m	in.	mm	
4310-0150-050	1-1/2	38.10	2.38	60.33	2	150	10.35	n/a	1.10	1.64	15.00	380.00	50
4310-0163-050	1-5/8	41.28	2.52	64.00	2	150	10.35	n/a	1.40	2.09	16.50	420.00	50
4310-0200-050	2	50.80	2.88	72.90	2	150	10.35	n/a	1.65	2.46	20.00	508.00	50
4310-0250-050	2-1/2	63.50	3.88	98.30	2	150	10.35	n/a	2.30	3.42	25.00	635.00	50

Working pressure (W.P.) is temperature dependent. See the General Information section Table II - Pressure Re-Rating for increased Temperatures (Page 10) for more information.

All sizes may not be stocked in all locations. Check with customer service for availability.
 We disclaim any liability for use of our products in applications other than which they are designed.

WARNING: This product can expose you to chemicals including carbon black, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information visit www.P65WARNINGS.ca.gov