


**4312**

**2-PLY SANDBLAST HOSE**

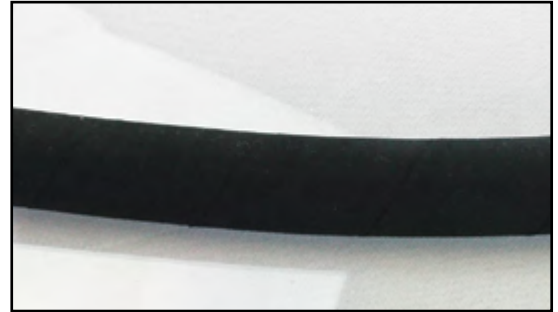

**CONSTRUCTION:** Tube is a SBR/NR blend which is a 1/4" thick, black and static dissipating. Cover is an SBR/NR blend, pin-pricked. Reinforcement is a two-ply synthetic fabric.

**TEMPERATURE:** -25°F (-32°C) to +185°F (+85°C)

**BRANDING:** None

**SAFETY FACTOR:** 3:1

**APPLICATION:** For conveyance of highly abrasive materials in sandblasting/cleaning and general maintenance in construction, shipyards, power plants and equipment rental.

**FEATURES:**

- Tube compounds are static-dissipating
- Highly abrasion resistant tube that will handle any blast grit
- Cover is abrasion and weather resistant

Part Number	I.D.		O.D.		Reinf. Plies	Max W.P. @ 68°F		Vacuum @ 68°F	Weight		Minimum Bend Radius		Std. Length (ft.)
	in.	mm	in.	mm		PSI	BAR		lb./ft.	KG/m	in.	mm	
4312-0050-050	1/2	12.70	1.00	25.40	2	150	10.35	n/a	0.31	0.46	5.00	127.00	50
4312-0051-050	1/2	12.70	1.06	26.99	2	150	10.35	n/a	0.33	0.49	5.00	127.00	50
4312-0051-100	1/2	12.70	1.06	26.99	2	150	10.35	n/a	0.33	0.49	5.00	127.00	100
4312-0052-050	1/2	12.70	1.13	28.58	2	150	10.35	n/a	0.38	0.57	5.00	127.00	50
4312-0075-050	3/4	19.05	1.50	38.10	2	150	10.35	n/a	0.60	0.89	7.50	190.00	50

**Working pressure (W.P.) is temperature dependent. See the General Information section Table II - Pressure Re-Rating for increased Temperatures (Page 10) for more information.**

All sizes may not be stocked in all locations. Check with customer service for availability.  
 We disclaim any liability for use of our products in applications other than which they are designed.

**WARNING:** This product can expose you to chemicals including carbon black, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information visit [www.P65WARNINGS.ca.gov](http://www.P65WARNINGS.ca.gov)