


# MATERIAL HANDLING HOSE



**4370**

**CONCRETE PLACEMENT HOSE - 800 PSI**

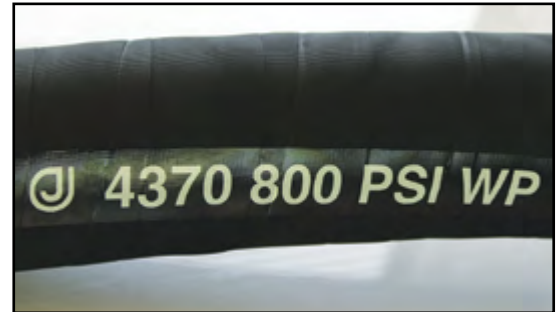

**CONSTRUCTION:** Tube is a blend of synthetic and natural elastomers, black, smooth and anti-static. Cover is also a blend of synthetic and natural elastomers, black, smooth with a cloth impression. Reinforcement is several spirals of high tensile textile cord.

**TEMPERATURE:** -22°F (-30°C) to +185°F (+85°C)

**BRANDING:** Jason logo 4370 800 PSI WP TEXTILE CONCRETE PLACEMENT. Clear mylar longitudinal stripe.

**APPLICATION:** High pressure concrete placement applications.

**FEATURES:**

- Anti-static tube and cover
- Cover is abrasion, weather and ozone resistant
- Designed for high kink resistance and perfect flow

**SAFETY FACTOR:** 3:1

Part Number	I.D.		O.D.		Reinf. Spirals	Max W.P. @ 68°F		Vacuum @ 68°F	Weight		Minimum Bend Radius		Std. Length (ft.)
	in.	mm	in.	mm		PSI	BAR		lb./ft.	KG/m	in.	mm	
4370-0200-050	2	50.80	2.68	68.00	6	800	55.2	n/a	1.41	2.09	13.75	350.00	50
4370-0200-100	2	50.80	2.68	68.00	6	800	55.2	n/a	1.41	2.09	13.75	350.00	100
4370-0300-050	3	76.20	3.78	96.00	6	800	55.2	n/a	2.40	3.57	16.10	408.00	50
4370-0300-100	3	76.20	3.78	96.00	6	800	55.2	n/a	2.40	3.57	16.10	408.00	100
4370-0400-050	4	101.60	4.96	126.00	8	800	55.2	n/a	4.23	6.29	26.00	660.00	50
4370-0400-100	4	101.60	4.96	126.00	8	800	55.2	n/a	4.23	6.29	26.00	660.00	100

**Working pressure (W.P.) is temperature dependent. See the General Information section Table II - Pressure Re-Rating for increased Temperatures (Page 10) for more information.**

All sizes may not be stocked in all locations. Check with customer service for availability. We disclaim any liability for use of our products in applications other than which they are designed.

**WARNING:** This product can expose you to chemicals including carbon black, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information visit [www.P65WARNINGS.ca.gov](http://www.P65WARNINGS.ca.gov)