


4515

RED PVC WATER DISCHARGE HOSE

HEAVY DUTY

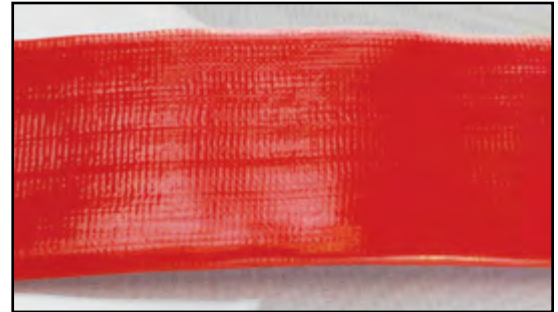

CONSTRUCTION: Tube and cover are bright red PVC. Reinforcement is knitted polyester yarn.

TEMPERATURE: -14°F (-26°C) to +150°F (+66°C)

BRANDING: None

APPLICATION: For water discharge in construction, agriculture and heavy duty equipment rental.

FEATURES:

- High WP for heavy duty applications
- Rolls flat for convenient storage
- Homogeneous construction eliminates tube and cover separation
- Maximum bonding as tube and cover extruded simultaneously

SAFETY FACTOR: 3:1

Part Number	I.D.		Wall Thickness		Reinf.	Max W.P. @ 68°F		Vacuum @ 68°F	Weight		Std. Length (ft.)
	in.	mm	in.	mm		PSI	BAR		lb./ft.	KG/m	
4515-1500	1-1/2	38.10	0.090	2.29	Knitted	140	9.65	n/a	0.22	0.32	300
4515-2000	2	50.80	0.090	2.29	Knitted	130	8.96	n/a	0.26	0.38	300
4515-2500	2-1/2	63.50	0.098	2.49	Knitted	125	8.61	n/a	0.30	0.44	300
4515-3000	3	76.20	0.098	2.49	Knitted	125	8.61	n/a	0.40	0.59	300
4515-4000	4	101.60	0.110	2.79	Knitted	125	8.61	n/a	0.62	0.91	300
4515-6000	6	152.40	0.111	2.82	Knitted	115	7.92	n/a	1.18	1.75	300
4515-8000	8	203.20	0.111	2.82	Knitted	70	4.82	n/a	1.23	1.83	300

Working pressure (W.P.) is temperature dependent. See the General Information section Table II - Pressure Re-Rating for increased Temperatures (Page 10) for more information.

All sizes may not be stocked in all locations. Check with customer service for availability. We disclaim any liability for use of our products in applications other than which they are designed.

WARNING: This product can expose you to chemicals including DINP, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information visit www.P65WARNINGS.ca.gov