
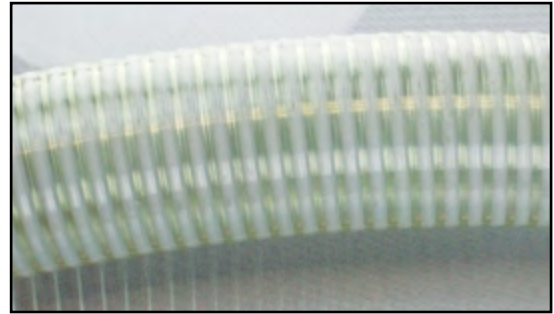


4615

CLEAR/WHITE HELIX PVC WATER SUCTION HOSE

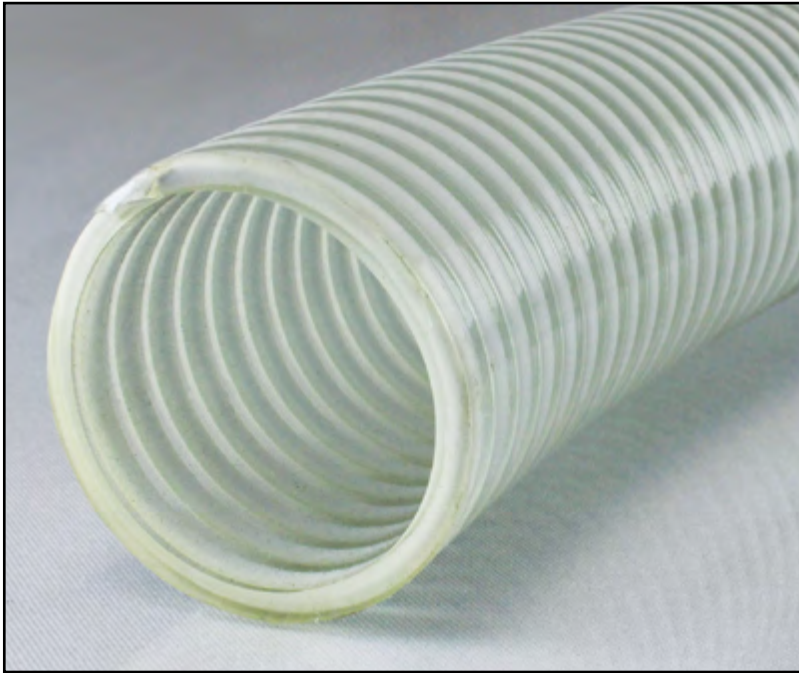

CONSTRUCTION: Tube is PVC, smooth, clear. Cover is also PVC, smooth to lightly corrugated. Reinforcement is a PVC helix.

TEMPERATURE: -14°F (-26°C) to +150°F (+66°C)

BRANDING: None.

SAFETY FACTOR: 3:1

APPLICATION: Suction, discharge or gravity flow of water, salt water and oily water in construction, agriculture, mining or equipment rental.

FEATURES:

- Cover is weather, ozone and UV resistant
- Lightweight and flexible
- Allows for visual flow inspection

Part Number	I.D.		O.D.		Reinf.	Max W.P. @ 68°F		Vacuum @ 68°F	Weight		Minimum Bend Radius		Std. Length (ft.)
	inch	mm	inch	mm		PSI	BAR		lb./ft.	KG/m	inch	mm	
4615-0750	3/4	19.05	0.95	24.13	PVC Helix	100	6.89	28.0	0.16	0.24	2.00	50.80	100
4615-1000	1	25.40	1.22	30.99	PVC Helix	100	6.89	28.0	0.20	0.30	5.00	127.00	100
4615-1250	1-1/4	31.75	1.41	35.81	PVC Helix	100	6.89	28.0	0.26	0.39	6.00	152.40	100
4615-1500	1-1/2	38.10	1.77	44.96	PVC Helix	100	6.89	28.0	0.35	0.52	7.00	177.80	100
4615-2000	2	50.80	2.32	58.93	PVC Helix	100	6.89	28.0	0.54	0.80	9.00	228.60	100
4615-2500	2-1/2	63.50	2.87	72.90	PVC Helix	80	5.52	26.0	0.70	1.04	11.00	279.40	100
4615-3000	3	76.20	3.35	85.09	PVC Helix	75	5.17	26.0	0.93	1.38	14.00	355.60	100
4615-4000	4	101.60	4.49	114.05	PVC Helix	60	4.14	26.0	1.48	2.20	18.00	457.20	100
4615-6050	6	152.50	6.46	164.08	PVC Helix	50	3.45	26.0	2.89	4.30	31.00	787.40	50

Working pressure (W.P.) is temperature dependent. See the General Information section Table II - Pressure Re-Rating for increased Temperatures (Page 10) for more information.

All sizes may not be stocked in all locations. Check with customer service for availability.
We disclaim any liability for use of our products in applications other than which they are designed.

WARNING: This product can expose you to chemicals including DINP, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information visit www.P65WARNINGS.ca.gov