


4735

MSHA FIRE HOSE ASSEMBLIES

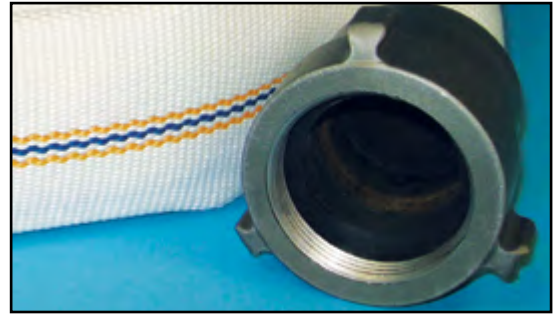

CONSTRUCTION: Chloroprene (CR) tube with a cover that is polyester.

TEMPERATURE: -25°F (-32°C) to +185°F (+85°C)

BRANDING: Jason logo 300 PSI Test, MSHA #18-FHA08001.

APPLICATION: Underground mining fire hose.

FEATURES:

- Meets MSHA rating 18-FHA08001, therefore resistant to fire
- Rolls flat for easy storage
- Couplings are anodized aluminum M x F expansion ring with rocker lugs
- 100% polyester jacket, free from defects, twists, knots and irregularities

SAFETY FACTOR: 3:1

Part Number	I.D.		Coupling Description	Reinf. Plies	Service Pressure		Test Pressure		Vacuum @ 68°F	Weight		Standard Lengths (ft.)
	in.	mm			PSI	BAR	PSI	BAR		lb./ft.	KG/m	
4735-0150-050ERNPS	1-1/2	38.10	NPS EXP Ring	n/a	300	20.68	900	62.04	n/a	0.23	0.34	50
4735-0150-050ERNST	1-1/2	38.10	NST EXP Ring	n/a	300	20.68	900	62.04	n/a	0.23	0.34	50
4735-0150-100ERNPS	1-1/2	38.10	NPS EXP Ring	n/a	300	20.68	900	62.04	n/a	0.23	0.34	100
4735-0150-100ERNST	1-1/2	38.10	NST EXP Ring	n/a	300	20.68	900	62.04	n/a	0.23	0.34	100

Working pressure (W.P.) is temperature dependent. See the General Information section Table II - Pressure Re-Rating for increased Temperatures (Page 10) for more information.

All sizes may not be stocked in all locations. Check with customer service for availability.
We disclaim any liability for use of our products in applications other than which they are designed.

WARNING: This product can expose you to chemicals including carbon black, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information visit www.P65WARNINGS.ca.gov