



WATER HOSE

Water Suction & Discharge Hose

Application:

Water suction and discharge hose for water and non-corrosive fluids. Suitable for irrigation systems, agricultural vehicles, dewatering construction projects and industrial wastewater.

Tube:

Black smooth rubber. Oil-mist resistant.

Reinforcement:

High tensile textile plies and steel helix wire.

Cover:

Black, smooth finish rubber, weather and abrasion resistant rubber with fabric impression. Oil-mist resistant.

Working Pressure:

150 PSI, 10 bar

Nominal Burst Pressure:


450 PSI, 30 bar

Temperature:

-40°F/+176°F (-40°C /+80°C)

Marking:

 PARAGON

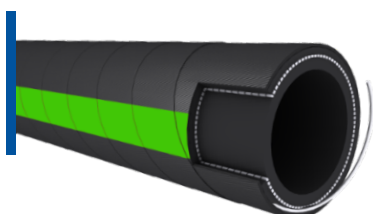

 PART NO.	 ID		 OD		 Vacuum.	 Min. b. r.	 Weight		 Max. L
	Inch	mm	Inch	mm	In.hg	Inch	lbs./FT	Kg/m	ft/m
RWSH-075-150	3/4	19.0	1.14	29	28"	3.75	0.3	0.45	200/61
RWSH-100-150	1	25.4	1.38	35	28"	4.9	0.44	0.65	200/61
RWSH-125-150	1¼	31.8	1.65	42	28"	6.3	0.54	0.80	200/61
RWSH-150-150	1½	38.1	1.89	48	28"	7.5	0.64	0.95	200/61
RWSH-200-150	2	51	2.4	61	28"	10.1	0.84	1.25	200/61
RWSH-250-150	2½	63	2.91	74	28"	12.4	1.11	1.65	200/61
RWSH-300-150	3	76	3.46	88	28"	14.85	1.48	2.2	200/61
RWSH-400-150	4	102	4.49	114	28"	19.5	1.98	2.95	200/61
RWSH-500-150	5	127	5.63	143	28"	24.5	3.29	4.9	100/30.5
RWSH-600-150	6	152	6.61	168	28"	30.2	4.37	6.5	100/30.5
RWSH-800-150	8	203	8.86	225	28"	40	8.06	12	100/30.5
RWSH-1000-150	10	254	10.98	279	28"	50	11.76	17.5	100/30.5
RWSH-1200-150	12	305	13.03	331	28"	60	15.46	23	100/30.5



To order hose use part number starting RWSH-size-150-LL, for 4" RWSH-400-150-100.
Hose assemblies with Bauer couplings are available on request.