


4359

NITRILE/PVC OIL RESISTANT DISCHARGE HOSE - BLACK

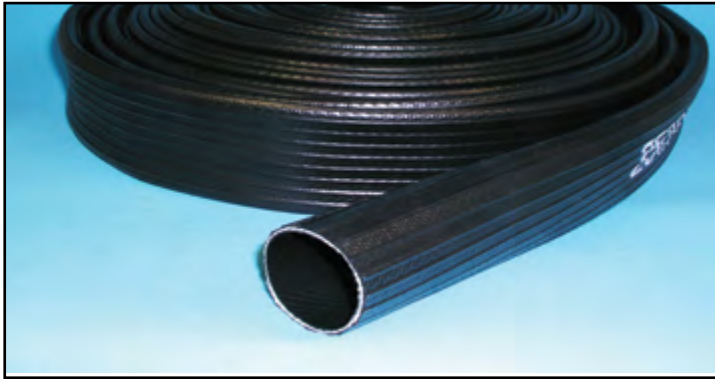

CONSTRUCTION: Tube and cover are black NBR/PVC.

TEMPERATURE: -20°F (-29°C) to +210°F (+99°C)

BRANDING: None

APPLICATION: For use in industrial washdown, irrigation, general dewatering, pump discharge and drainage.

FEATURES:

- Up to 250 PSI (17.24 BAR) working pressure
- Oil resistant tube and cover
- Resists heat, cold, ozone and UV light
- Lightweight and flexible
- 660 ft. lengths available in 4", 6" and 8" IDs

SAFETY FACTOR: 3:1

Part Number	I.D.		Wall Thickness		Reinf. Plies	Max W.P. @ 68°F		Vacuum @ 68°F	Weight		Std. Length (ft.)
	in.	mm	in.	mm		PSI	BAR		lb./ft.	KG/m	
4359-0075-050	3/4	19.05	0.110	2.79	n/a	250	17.25	n/a	0.10	0.15	50
4359-0075-100	3/4	19.05	0.110	2.79	n/a	250	17.25	n/a	0.10	0.15	100
4359-0100-050	1	25.40	0.110	2.79	n/a	250	17.25	n/a	0.14	0.21	50
4359-0100-100	1	25.40	0.110	2.79	n/a	250	17.25	n/a	0.14	0.21	100
4359-0150-050	1-1/2	38.10	0.110	2.79	n/a	250	17.25	n/a	0.26	0.39	50
4359-0150-100	1-1/2	38.10	0.110	2.79	n/a	250	17.25	n/a	0.26	0.39	100
4359-0200-050	2	50.80	0.110	2.79	n/a	250	17.25	n/a	0.34	0.51	50
4359-0200-100	2	50.80	0.110	2.79	n/a	250	17.25	n/a	0.34	0.51	100
4359-0250-050	2-1/2	63.50	0.110	2.79	n/a	250	17.25	n/a	0.47	0.70	50
4359-0250-100	2-1/2	63.50	0.110	2.79	n/a	250	17.25	n/a	0.47	0.70	100
4359-0300-050	3	76.20	0.110	2.79	n/a	250	17.25	n/a	0.65	0.97	50
4359-0300-100	3	76.20	0.110	2.79	n/a	200	13.79	n/a	0.65	0.97	100
4359-0400-050	4	102.40	0.110	2.79	n/a	200	13.79	n/a	0.83	1.24	50
4359-0400-100	4	102.40	0.110	2.79	n/a	200	13.79	n/a	0.83	1.24	100
4359-0400-660	4	102.40	0.110	2.79	n/a	200	13.79	n/a	0.83	1.24	660
4359-0600-050	6	152.40	0.110	2.79	n/a	150	10.35	n/a	1.60	2.39	50
4359-0600-100	6	152.40	0.110	2.79	n/a	150	10.35	n/a	1.60	2.39	100
4359-0600-660	6	152.40	0.110	2.79	n/a	150	10.35	n/a	1.60	2.39	660
4359-0800-050	8	204.80	0.110	2.79	n/a	150	10.35	n/a	2.30	3.43	50
4359-0800-100	8	204.80	0.110	2.79	n/a	150	10.35	n/a	2.30	3.43	100
4359-0800-660	8	204.80	0.110	2.79	n/a	150	10.35	n/a	2.30	3.43	660
4359-1000-050	10	254.0	0.160	4.06	n/a	150	10.35	n/a	3.20	4.77	50
4359-1000-100	10	254.0	0.160	4.06	n/a	150	10.35	n/a	3.20	4.77	100
4359-1200-050	12	304.80	0.170	4.32	n/a	150	10.35	n/a	3.50	5.22	50
4359-1200-100	12	304.80	0.170	4.32	n/a	150	10.35	n/a	3.50	5.22	100

Working pressure (W.P.) is temperature dependent. See the General Information section Table II - Pressure Re-Rating for increased Temperatures (Page 10) for more information.

All sizes may not be stocked in all locations. Check with customer service for availability.

We disclaim any liability for use of our products in applications other than which they are designed.

WARNING: This product can expose you to chemicals including DINP, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information visit www.P65WARNINGS.ca.gov