

# TVK


## Special lightweight heavy duty clamp for drum lifting

### Application:

- Designed for safe lifting, handling, and transporting of steel (oil) drums
- Single clamp application on empty or filled sealed drums
- Filled open drums should be lifted by use of two clamps with a two leg chain sling
- Jaw opening available from: 0 to .66 in
- Working load limit (WLL) 1,100 lbs

### Features and Benefits:

- Automatic locking mechanism
- Lightweight design for easy handling
- Tough quality heavy-duty welded shell body
- Maintenance-friendly. Easy to exchange parts are available upon request

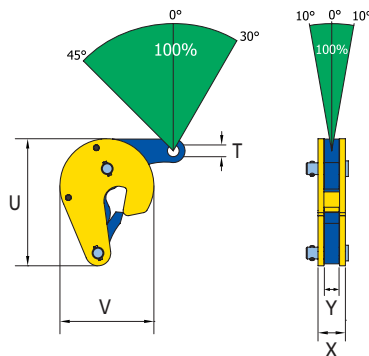

| Reference No. | Type | Capacity/WLL<br>(lb/pc) | Jaw opening<br>(R) (inches) | Dimensions in inches |      |      |      |      | Weight<br>(lb/pc) |
|---------------|------|-------------------------|-----------------------------|----------------------|------|------|------|------|-------------------|
|               |      |                         |                             | U                    | V    | T    | X    | Y    |                   |
| 828000        | TVK  | 1,100                   | 0 - 0.66                    | 4.76                 | 3.78 | 0.47 | 1.10 | 0.59 | 3                 |

# TVKH


## Special lightweight heavy duty clamp for upright/vertical drum lifting

### Application:

- Designed for lifting, handling, and transporting of (oil) drums, where the drums have to stay in a upright/vertical position
- Single clamp application on empty or filled drums
- During lifting and transportation the centre of gravity of the drum is always below the lifting point
- Jaw openings available from: 0 to 1.00 in.
- Working load limit (WLL) 1,300 lbs

### Features and Benefits:

- Lightweight design for easy handling in tight spaces between other drums
- Tough quality heavy-duty body
- Equipped with a manual safety locking mechanism, ensuring the clamp does not slip when lifting force is applied and when load is being lowered
- Maintenance-friendly. Easy to exchange parts are available upon request

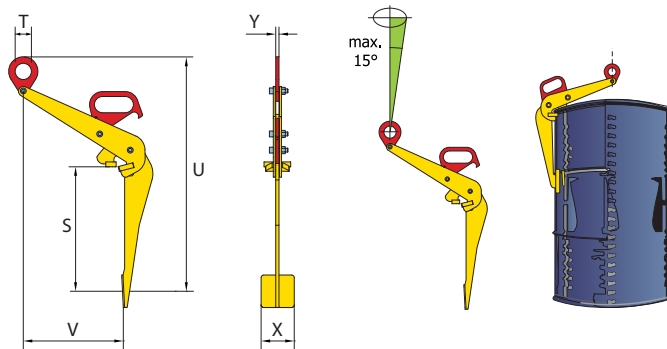

| Reference No. | Type | Capacity/WLL<br>(lb/pc) | Jaw opening<br>(R) (inches) | Dimensions in inches |       |       |      |      |      | Weight<br>(lb/pc) |
|---------------|------|-------------------------|-----------------------------|----------------------|-------|-------|------|------|------|-------------------|
|               |      |                         |                             | U                    | S     | V     | T    | X    | Y    |                   |
| 828100        | TVKH | 1,300                   | 0 - 1.00                    | 30.11                | 17.08 | 12.00 | 1.96 | 3.93 | 0.39 | 16                |