

# TNMH


Horizontal lifting without marking, scratching, or damaging the material surface

## Application:

- For horizontal lifting and transporting of all non-deflecting plates and structures without marking, scratching, and/or damaging the material surface
- Perfect for lifting materials such as (stainless) steel, aluminum, natural stone, composite, painted materials, wood, glass, plastic, etc.
- **Terrier TNMH lifting clamps must always be used in pairs (or multiples thereof)**
- Jaw openings available from: 0 to 2.00 in.
- Working load limit (WLL) 2,200 - 13,200 lbs per pair

## Features and Benefits:

- Jaw and cam are covered with a special high quality pressure resistant material
- Compact design and high lifting capacity
- Lightweight design for easy handling
- Tough quality heavy-duty welded body
- Maintenance-friendly. Easy to exchange parts are available upon request

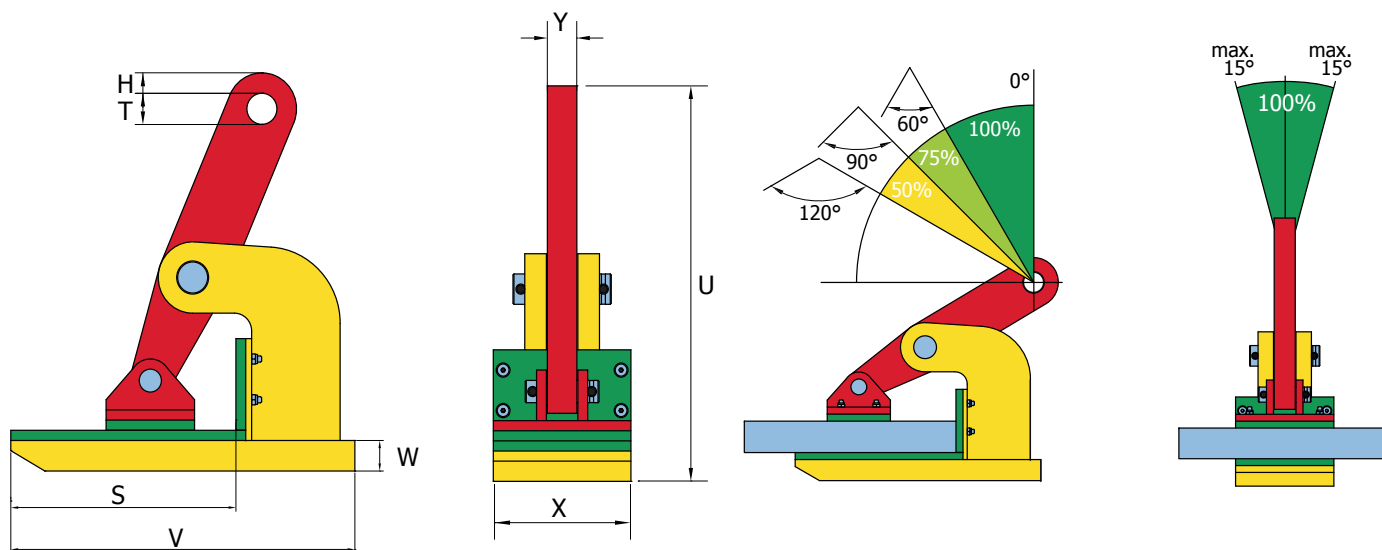

Terrier TNMH lifting clamps must always be used in pairs (or multiples thereof)

| Reference No. | Type   | Capacity/WLL |           | Jaw opening<br>(R) (inches) | Dimensions in inches |      |      |      |      |       |      |      | Weight<br>(lb/pc) |
|---------------|--------|--------------|-----------|-----------------------------|----------------------|------|------|------|------|-------|------|------|-------------------|
|               |        | (lb/pc)      | (lb/pair) |                             | V                    | S    | W    | T    | H    | U     | X    | Y    |                   |
| 862810        | 1 TNMH | 1,100        | 2,200     | 0 - 1.00                    | 5.51                 | 3.70 | 0.59 | 0.79 | 0.39 | 6.10  | 2.56 | 0.59 | 6                 |
| 862820        | 2 TNMH | 2,200        | 4,400     | 0 - 1.77                    | 8.86                 | 5.94 | 0.59 | 1.20 | 0.59 | 10.51 | 3.54 | 0.59 | 17                |
| 862830        | 3 TNMH | 3,300        | 6,600     | 0 - 1.77                    | 8.86                 | 5.94 | 0.79 | 1.20 | 0.59 | 10.67 | 3.54 | 0.59 | 19                |
| 862841        | 4 TNMH | 4,400        | 8,800     | 0 - 2.00                    | 9.84                 | 6.34 | 0.79 | 1.20 | 0.68 | 11.81 | 4.53 | 1.18 | 34                |
| 862861        | 6 TNMH | 6,600        | 13,200    | 0 - 2.00                    | 9.84                 | 6.34 | 0.98 | 1.20 | 0.68 | 12.05 | 5.12 | 1.18 | 36                |