


PETROLEUM HOSE

3087

SAFETY OILFIELD CLEAN-UP AND RECOVERY HOSE - SΩ

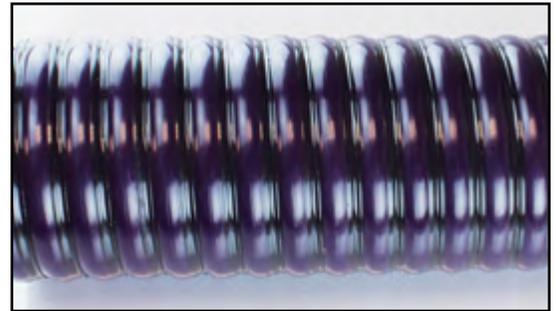

CONSTRUCTION: NBR/PVC tube with a PVC clockwise helix with an SΩ ground wire.

TEMPERATURE: -40°F (-40°C) to +140°F (+60°C)

BRANDING: None

APPLICATION: Great for the recovery of waste crude oil, diesel fuel and salt water. Used for cleaning up tank bottoms and oil spills.

FEATURES:

- NBR/PVC tube is oil and gas resistant
- Very flexible and easy to handle
- All sizes are full vacuum
- Cold weather resistant
- Safety Ohm (SΩ) ground wire embedded into the hose wall to help prevent the build-up of static electricity. SΩ wire must be secured to ground to dissipate static electricity.

SAFETY FACTOR: 3:1

Part Number	I.D.		O.D.		Reinf.	Max W.P. @ 68°F		Vacuum @ 68°F	Weight		Minimum Bend Radius		Std. Length (ft.)
	in.	mm	in.	mm		PSI	BAR		lb./ft.	KG/m	in.	mm	
3087-0200-100	2	50.80	2.43	61.72	PVC Helix	50	3.45	29.0	0.67	1.00	4.00	101.60	100
3087-0300-100	3	76.20	3.52	89.41	PVC Helix	45	3.10	29.0	1.10	1.64	6.00	152.40	100
3087-0400-100	4	101.60	4.60	116.84	PVC Helix	38	2.62	29.0	1.84	2.74	8.20	208.30	100

Working pressure (W.P.) is temperature dependent. See the General Information section Table II - Pressure Re-Rating for increased Temperatures (Page 10) for more information.

Note: Vacuum is temperature dependent.

SΩ = Safety Ohm
 All sizes may not be stocked in all locations. Check with customer service for availability.
 We disclaim any liability for use of our products in applications other than which they are designed.

WARNING: This product can expose you to chemicals including carbon black, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information visit www.P65WARNINGS.ca.gov