


# PETROLEUM HOSE

## 3040 POLYURETHANE DROP HOSE FOR SUCTION AND DELIVERY OF GASOLINE AND ALTERNATIVE FUELS - SΩ

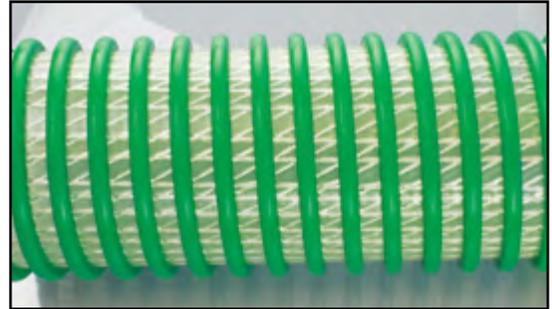

**CONSTRUCTION:** Polyurethane tube, smooth bore with embedded SΩ ground wire in the hose wall with a sturdy clockwise PVC helix, one braid of high tensile polyester yarn reinforcement.

**TEMPERATURE:** -40°F (-40°C) to +140°F (+60°C)

**APPLICATION:** Used in the delivery of biofuels, gasoline, kerosene and fuel oil.

**SAFETY FACTOR:** 3:1

**FEATURES:**

- Higher transfer pressures
- Clear visual flow
- -40°F cold weather resistance
- Sub-zero flexibility
- Easy to drag with "Go-Glide" external clockwise PVC helix
- Safety Ohm (SΩ) ground wire embedded into the hose wall to help prevent the build-up of static electricity. SΩ wire must be secured to ground to dissipate static electricity.
- Vacuum up to 29" of Hg

Part Number	I.D.		O.D.		Reinf. Braids	Max W.P. @ 68°F		Vacuum @ 68°F	Weight		Minimum Bend Radius		Std. Length (ft.)
	in.	mm	in.	mm		PSI	BAR		lb./ft.	KG/m	in.	mm	
3040-0200-100	2	50.80	2.46	62.48	1	75	5.17	29.0	0.63	0.94	4.00	101.60	100
3040-0300-100	3	76.20	3.78	96.01	1	65	4.48	29.0	1.20	1.79	6.00	152.40	100
3040-0400-100	4	101.60	4.83	122.68	1	65	4.48	29.0	1.71	2.54	8.00	203.20	100

**Working pressure (W.P.) is temperature dependent. See the General Information section Table II - Pressure Re-Rating for increased Temperatures (Page 10) for more information.**

**Note:** Use JASON GREEN banding sleeves only when securing coupling for 3" and 4" ID's. Discharge pressures and vacuum are temperature dependent.

SΩ = Safety Ohm

All sizes may not be stocked in all locations. Check with customer service for availability.

We disclaim any liability for use of our products in applications other than which they are designed.

**WARNING:** This product can expose you to chemicals including DINP, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information visit [www.P65WARNINGS.ca.gov](http://www.P65WARNINGS.ca.gov)