

 **WATER HOSE**
PVC Lay-Flat Water Discharge Hose

Application:

Light and economical lay flat hose which is easy to roll up and pack for storage after use. It is suitable for drip irrigation application and no tearing after punching. Produced in a single process inner and outer tube bound with high tensile yarn reinforcement.

Temperature:

-5°F/+170°F (-20°C /+76°C)

Marking:

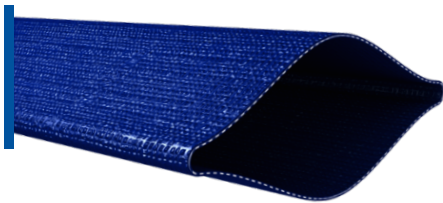





Tube and Cover:

Durable Polyvinyl Chloride PVC material.

Reinforcement:

High strength polyester yarn spiral wrap.



| PART NO.  | ID  | | OD  | | Pressure  | Weight  | | Max. L  |
|---|---|-----|---|-------|---|---|------|---|
| | Inch | mm | Inch | mm | PSI in 60°F | lbs./Ft | Kg/m | ft/m |
| BLFW-100-110-300 | 1 | 25 | 1.13 | 26.5 | 110 | 0.11 | 0.16 | 300/91 |
| BLFW-125-80-300 | 1¼ | 32 | 1.38 | 33.1 | 80 | 0.13 | 0.19 | 300/91 |
| BLFW-150-80-300 | 1½ | 38 | 1.63 | 39.7 | 80 | 0.16 | 0.24 | 300/91 |
| BLFW-200-70-300 | 2 | 51 | 2.13 | 52.9 | 70 | 0.23 | 0.34 | 300/91 |
| BLFW-250-70-300 | 2½ | 63 | 2.66 | 66.2 | 70 | 0.29 | 0.43 | 300/91 |
| BLFW-300-65-300 | 3 | 76 | 3.16 | 79.4 | 65 | 0.39 | 0.58 | 300/91 |
| BLFW-400-60-300 | 4 | 101 | 4.17 | 105.8 | 60 | 0.52 | 0.77 | 300/91 |
| BLFW-500-60-300 | 5 | 127 | 5.17 | 132.2 | 60 | 0.68 | 1.01 | 300/91 |
| BLFW-600-60-300 | 6 | 150 | 6.17 | 158.6 | 60 | 0.86 | 1.28 | 300/91 |
| BLFW-800-45-300 | 8 | 203 | 8.21 | 211.4 | 45 | 1.3 | 1.94 | 300/91 |
| BLFW-1000-45-300 | 10 | 254 | 10.24 | 264.2 | 45 | 1.81 | 2.69 | 300/91 |



Available with C/E camlock coupling on request.