


MATERIAL HANDLING HOSE



3020 HD POLYURETHANE LINED, PVC MATERIAL HANDLING HOSE

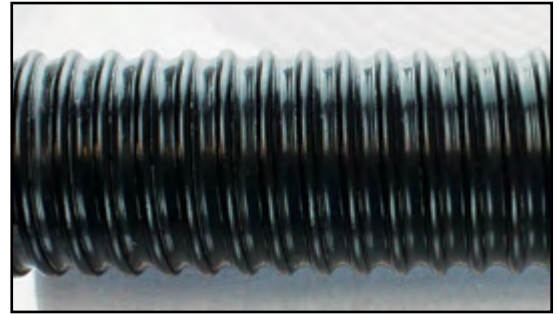

CONSTRUCTION: Polyurethane abrasion resistant liner with a PVC cover and a sturdy clockwise PVC helix.

TEMPERATURE: -40°F (-40°C) to +140°F (+60°C)

APPLICATION: For vacuum and transfer of abrasive crushed rock, gravel, sand or dry fertilizers, fly ash and also used for shot blast recovery.

FEATURES:

- Abrasion resistant PU liner
- Static dissipating cover compound
- -40°F cold weather resistance
- Sub-zero flexibility
- Easy to drag with "Glo-Glide" external clockwise PVC helix

SAFETY FACTOR: 3:1

Part Number	I.D.		O.D.		Reinf.	Max. W.P. @ 68° F		Vacuum @ 68°F	Weight		Minimum Bend Radius		Std. Length (ft.)
	inch	mm	inch	mm		PSI	BAR		lb./ft.	KG/m	inch	mm	
3020-0150-100	1-1/2	38.10	1.85	46.99	PVC Helix	50	3.45	29.0	0.42	0.63	2.00	50.80	100
3020-0200-100	2	50.80	2.40	60.96	PVC Helix	40	2.76	29.0	0.59	0.88	3.00	76.20	100
3020-0250-100	2-1/2	63.50	3.09	78.49	PVC Helix	40	2.76	29.0	0.82	1.22	3.00	76.20	100
3020-0300-100	3	76.20	3.64	92.46	PVC Helix	40	2.76	29.0	1.18	1.76	4.00	101.60	100
3020-0400-100	4	101.60	4.76	120.90	PVC Helix	35	2.41	29.0	1.94	2.89	6.00	152.40	100
3020-0600-020	6	152.40	6.80	172.72	PVC Helix	30	2.07	28.0	3.50	5.21	12.00	304.80	20
3020-0600-050	6	152.40	6.80	172.72	PVC Helix	30	2.07	28.0	3.50	5.21	12.00	304.80	50
3020-0600-100	6	152.40	6.80	172.72	PVC Helix	30	2.07	28.0	3.50	5.21	12.00	304.80	100
3020-0800-020	8	203.20	9.16	232.66	PVC Helix	30	2.07	28.0	5.90	8.78	18.00	457.20	20
3020-0800-050	8	203.20	9.16	232.66	PVC Helix	30	2.07	28.0	5.90	8.78	18.00	457.20	50

Working pressure (W.P.) is temperature dependent. See the General Information section Table II - Pressure Re-Rating for increased Temperatures (Page 10) for more information.

All sizes may not be stocked in all locations. Check with customer service for availability.

We disclaim any liability for use of our products in applications other than which they are designed.

WARNING: This product can expose you to chemicals including DINP, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information visit www.P65WARNINGS.ca.gov